


FIG. BGV116/225/216/340/440/416

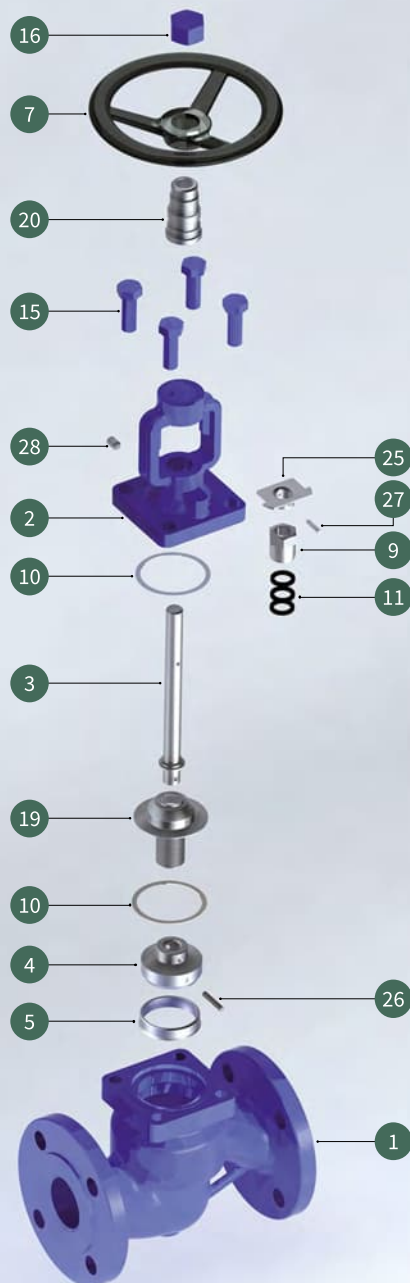

Partes y materiales

Parts & materials


- | | | |
|---|---|---|
| <p>1 Cuerpo Body
BGV116: EN-GJL250
BGV216/225: EN-GJS400-18
BGV340: 1.0619</p> <p>2 Puente Bonnet
BGV116: EN-GJL250
BGV216/225: EN-GJS400-18
BGV340: 1.0619</p> <p>3 Eje Stem
x 12 CrNi S 18.8</p> <p>4 Disco Disc
X 20 Cr 13</p> <p>5 Asiento Seat
X 22 CrNi 17</p> | <p>7 Volante Handwheel
EN-GJS 400</p> <p>9 Tuerca prensa Gland Nut
EN-10087</p> <p>10 Junta Gasket
Graphite</p> <p>11 Estopada Gland packing
Graphite</p> <p>15 Tornillos Bolts
BGV116: 5.6
BGV216/225/340: 8.8</p> <p>16 Tuerca volante Handwheel nut
EN-10087</p> | <p>19 Fuelle Bellow
1.4571</p> <p>20 Casquillo roscado Threaded bushing
EN-10087</p> <p>25 Dispositivo antivuelta Anti Turn Device
EN-10025</p> <p>26 Pasador Pin
AISI 304</p> <p>27 Pasador Pin
AISI 304</p> <p>28 Engrasador Lubricator</p> |
|---|---|---|

FIG. BGV116/225/216/340/440/416




Válvulas de Globo con Fuelle Paso Total, Bridas PN16, PN25 y PN40, desde DN15 a DN200. Cuerpo en Hierro (EN-GJL250), en Fundición Nodular (EN-GJL400-18), en Acero al Carbono (1.0619) y en Acero Inoxidable (1.4408) nueva Fig. BGV440/416 (PN40 hasta DN50 y PN16 desde DN65). Disco y Asiento en Inoxidable. Fuelle de doble capa en 304. Disco Cónico. Dispositivo Back seat. Distancia entre caras (face to face) según norma EN 558-1 Serie 1. Las válvulas están certificadas CE.


Bellow Globe Valve, Full Bore, Flanges PN16, PN25 and PN40, from DN15 to DN200. Cast Iron (EN GJL250), Nodular Iron (EN GJL400), Carbon Steel (1.0619) and Stainless Steel (1.4408) Body, for the new Fig. BGV440/416 (PN40 up to DN50 and PN16 up to DN65). Stainless Steel Disc and Seat. Double Wall Bellow in 304. Conical disc. Back Seat device. The face-to-face of the valve is according with EN 558-1 Serie 1. The valves are CE certified.

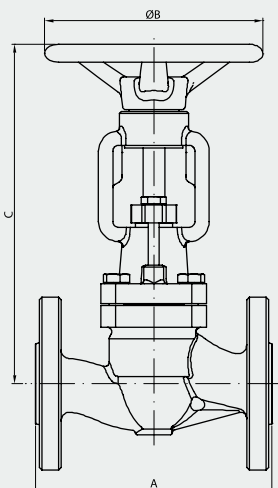

Presión - Temperatura Pressure - Temperature

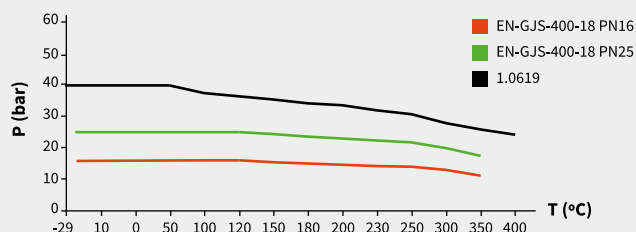

Presión - Temperatura Pressure - Temperature

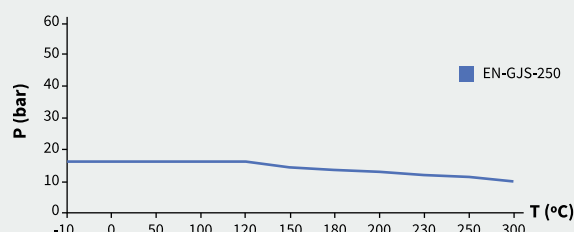

Presión - Temperatura Pressure - Temperature

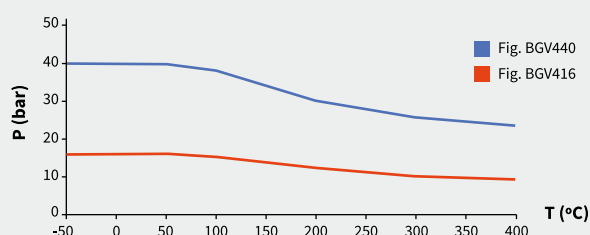


Fig. BGV116/225/216/340/440/416

DN	A	C	ØB	Kv	Weight BGV116	Weight BGV216	Weight BGV225	Weight BGV340	Weight BGV440	Weight BGV416
15	130	190	120	3,8	3,2	3,2	3,2	3,7	3,7	-
20	150	195	120	7	4,4	4,4	4,4	4,8	4,8	-
25	160	220	140	10	4,8	4,8	4,8	6,8	6,8	-
32	180	219	140	19	6,1	6,3	6,3	7,8	7,8	-
40	200	256	180	35	11	11	11	13	13	-
50	230	265	180	43	13	13	13	15,5	15,5	-
65	290	328	200	60	21	21,3	21,3	23	-	21
80	310	341	200	110	26,4	26,4	27	28	-	27
100	350	376	250	146	40	40	41	43	-	40
125	400	488	400	210	53,5	53,5	54,5	68	-	56
150	480	531	400	300	81	84	85	100	-	82
200	600	685	400	670	154	157	162	202	-	156

Dimensiones en mm, peso en kg y Kv en m³/h.
Dimensions in mm, weight in kg and Kv in m³/h.